Transit 2015
Dimensions and Capacities

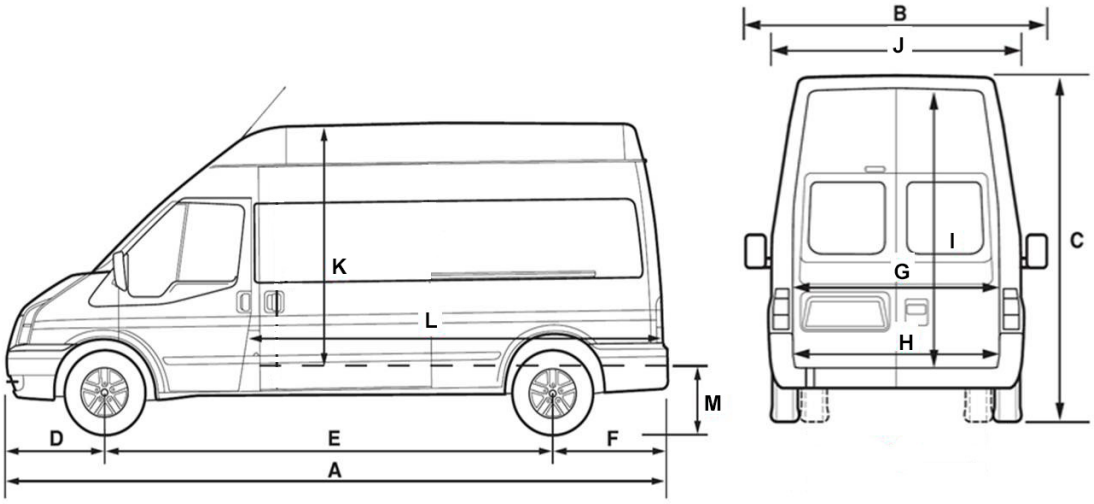

BODY DIMENSIONS — Van

Inches (unless otherwise noted)

Configuration		Low Roof RWB	Med. Roof RWB	Low Roof LWB	Med. Roof LWB	High Roof LWB	High Roof LWB EL (SRW/DRW)
Description							
A	Length	219.9	***217.8/ 219.9(1)***	237.6	***235.5/ 237.6(1)***	***235.5/ 237.6(1)***	***263.9/ 266.1(1)***
B	Width with mirrors	97.4	97.4	97.4	97.4	97.4	97.4
	Width without mirrors	81.3	81.3	81.3	81.3	81.3	81.3/83.7
	Width without mirrors and door handles (SRW)	***79.6***	***79.6***	***79.6***	***79.6***	***79.6***	***79.6/—***
C	Height	83.6	100.8	83.2	100.7	110.1	109.4
D	Front Overhang	40.3	40.3	40.3	40.3	40.3	40.3
E	Wheelbase	129.9	129.9	147.6	147.6	147.6	147.6
F	Rear Overhang	49.7	***47.6/ 49.7(1)***	49.7	***47.6/ 49.7(1)***	***47.6/ 49.7(1)***	***76.0/ 78.1(1)***
G	Rear Cargo Door Opening Width	61.7	61.7	61.7	61.7	61.7	61.7
H	Cargo Width Between Wheelhouse	54.8	54.8	54.8	54.8	54.8	54.8/45.4
I	Rear Cargo Door Opening Height	49.5	64.9	49.5	64.9	74.3	74.3
J	Max. Load Width (excluding wheelhouse)	70.2	70.2	70.2	70.2	70.2	70.2
K	Max. Cargo Height	56.9	72.0	56.9	72.0	81.5	81.5
L	Max. Cargo Length at Floor	126.0	126.0	143.7	143.7	143.7	172.2
M	Load Height (curb)	28.9	28.9	28.7	28.7	28.7	28.0

(1) Extended bumper.

RWB = Regular wheelbase
LWB = Long wheelbase
EL = Extended length

SRW = Single rear wheel
DRW = Dual rear wheel

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

2015 Transit

Dimensions and Capacities cont'd

BODY DIMENSIONS — Wagon

Inches (unless otherwise noted)

Configuration	Low Roof RWB	Med. Roof RWB	Low Roof LWB	Med. Roof LWB	High Roof LWB	High Roof LWB EL (SRW/ DRW)
Description						
Wheelbase	***129.9***	***129.9***	***147.6***	***147.6***	***147.6***	***147.6***
Length	219.9	***217.8/ 219.9(1)***	237.6	***235.5/ 237.6(1)***	***235.5/ 237.6(1)***	***263.9/ 266.1(1)***
Height	82.2	98.7	82.4	99.2	108.6	107.7
Width with mirrors	97.4	97.4	97.4	97.4	97.4	97.4
Width without mirrors	81.3	81.3	81.3	81.3	81.3	81.3
Width without mirrors and door handles (SRW)	***79.6***	***79.6***	***79.6***	***79.6***	***79.6***	***79.6/—***
Front Track	68.2	68.2	68.2	68.2	68.2	68.2
Rear Track	68.6	68.6	68.6	68.6	68.6	68.6
Front Overhang	40.3	40.3	40.3	40.3	40.3	40.3
Rear Overhang	49.7	47.6	49.7	47.6	47.6	76.0
Rear Cargo Door Opening Height	46.9(2)	62.8	46.9	62.8	72.2	72.2
Rear Cargo Door Opening Width	59.8	59.8	59.8	59.8	59.8	59.8
Minimum Running Ground Clearance	6.1	6.1	6.0	6.0	6.0	6.0

(1) With extended bumper.
(2) 10-passenger Wagon.

RWB = Regular wheelbase
LWB = Long wheelbase
EL = Extended length

SRW = Single rear wheel
DRW = Dual rear wheel

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

Transit
Dimensions and Capacities cont'd

BODY DIMENSIONS — Cutaway (Low Roof)

Inches (unless otherwise noted)

Configuration	RWB SRW	RWB DRW	LWB SRW	LWB DRW	LWB EL DRW
Description					
Wheelbase	138	138	***155.7***	***155.7***	178
Length	223.3	223.3	241.1	241.1	263.4
Height	87.3	***86.8***	87.0	86.5	86.5
Width	80.8	83.1	80.8	83.1	83.1
Width without mirrors and door handles (SRW)	***79.6***	—	***79.6***	—	—
Front Track	68.2	68.5	68.2	68.5	68.5
Rear Track	68.6	65.7	68.6	65.7	65.7
Front Overhang	40.3	40.3	40.3	40.3	40.3
Rear Overhang (Rear Axle to End of Frame)	45.1	45.1	45.1	45.1	45.1
Load Height (Loaded)	25.0	24.7/24.5	25.9/ 25.5	25.7/25.4	25.0/24.6
Cab Length	95.7	95.7	95.7	95.7	95.7
Cab Rear to Rear Axle	82.6	82.6	100.3	100.3	122.6
Top of Frame to Top of Cab	61.2	61.2	61.2	61.2	61.2

BODY DIMENSIONS — Chassis Cab (Low Roof)

Inches (unless otherwise noted)

Configuration	RWB SRW	RWB DRW	LWB SRW	LWB DRW	LWB EL DRW
Description					
Wheelbase	138	138	***155.7***	***155.7***	178
Length	223.3	223.3	241.1	241.1	263.4
Height	87.2	86.7	86.9	86.4	86.4
Width	80.8	83.1	80.8	83.1	83.1
Width without mirrors and door handles (SRW)	***79.6***	—	***79.6***	—	—
Front Track	68.2	68.5	68.2	68.5	68.5
Rear Track	68.6	65.7	68.6	65.7	65.7
Front Overhang	40.3	40.3	40.3	40.3	40.3
Rear Overhang (Rear Axle to End of Frame)	45.1	45.1	45.1	45.1	45.1
Load Height (Loaded)	24.8	24.7/24.3	25.6/25.3	25.6/25.2	24.9/24.4
Cab Length	95.7	95.7	95.7	95.7	95.7
Cab Rear to Rear Axle	82.6	82.6	100.3	100.3	122.6
Top of Frame to Top of Cab	61.2	61.2	61.2	61.2	61.2

RWB = Regular wheelbase
LWB = Long wheelbase
EL = Extended length

SRW = Single rear wheel
DRW = Dual rear wheel

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

2015 Transit

Dimensions and Capacities cont'd

INTERIOR DIMENSIONS — Van/Wagon

Configuration	Low Roof RWB	Med. Roof RWB	Low Roof LWB	Med. Roof LWB	High Roof LWB	High Roof LWB EL (SRW)	High Roof LWB EL (DRW)
Description (in.)							
Head Room							
1st Row	40.8	52.0	40.8	52.0	56.6	56.6	56.6
2nd Row(1)	41.1	55.8	41.1	55.8	65.2	65.2	65.2
3rd Row(1)	40.6	55.8	***40.6***	55.8	65.2	65.2	65.2
4th Row(1)	38.7(2)	55.8(2)	38.7	55.8	65.2	65.2	65.2
5th Row(1)	—	—	34.2(3)	47.2(3)	55.0(3)	55.0(3)	55.0(3)
Shoulder Room							
1st Row	67.9	67.9	67.9	67.9	67.9	67.9	67.9
2nd Row(1)	71.4(2)	71.4(2)	71.4	71.4	71.4	71.4	71.4
3rd Row(1)	67.0	67.0	67.0	67.0	67.0	67.0	67.0
4th Row(1)	67.8(2)	67.8(2)	67.8	67.8	67.8	67.8	67.8
5th Row(1)	—	—	60.8(3)	60.8(3)	60.8(3)	60.8(3)	60.8(3)
Hip Room							
1st Row	67.5(2)	67.5(2)	67.5	67.5	67.5	67.5	67.5
2nd Row(1)	69.6	69.6	69.6	69.6	69.6	69.6	69.6
3rd Row(1)	67.3	67.3	67.3	67.3	67.3	67.3	67.3
4th Row(1)	68.0(2)	68.0(2)	68.0	68.0	68.0	68.0	68.0
5th Row(1)	—	—	61.0(3)	61.0(3)	61.0(3)	61.0(3)	61.0(3)
Leg Room							
1st Row	***41.3***	***41.3***	***41.3***	***41.3***	***41.3***	***41.3***	***41.3***
2nd Row(1)	33.7	33.7	33.7	33.7	33.7	33.7	33.7
3rd Row(1)	35.6	35.6	35.6	35.6	35.6	35.6	35.6
4th Row(1)	35.6(2)	35.6(2)	35.6	35.6	35.6	35.6	35.6
5th Row(1)	—	—	35.6(3)	35.6(3)	35.6(3)	35.6	35.6
Cargo Width (max. excluding wheelhouses)							
Van	70.2	70.2	70.2	70.2	70.2	70.2	70.2
Wagon	69.8	69.8	69.8	69.8	69.8	69.8	69.8
Cargo Width between Wheelhouses							
Van	54.8	54.8	54.8	54.8	54.8	54.8	45.4
Wagon	53.7	53.7	53.7	53.7	53.7	53.7	53.7
Cargo Floor to Ceiling Height (max. load height)							
Van	56.9	72.0	56.9	72.0	81.5	81.5	81.5
Wagon	52.8(4)	67.6	52.8	67.6	77.0	77.0	77.0

(1) Wagon only.
(2) 10-passenger Wagon.
(3) 15-passenger Wagon.
(4) 8-passenger Wagon.

LR = Low roof
MR = Medium roof
HR = High roof

RWB = Regular wheelbase
LWB = Long wheelbase
EL = Extended length

SRW = Single rear wheel
DRW = Dual rear wheel

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

esourcebook.dealerconnection.com

Transit
Dimensions and Capacities cont'd

INTERIOR DIMENSIONS — Cutaway/Chassis Cab SRW and DRW

Configuration	RWB	LWB	LWB EL
Description (in.)			
Wheelbase	138	***155.7***	178
Head Room – 1st Row	44.9	44.9	44.9
Max. Leg Room – 1st Row	41.3	41.3	41.3
Hip Room – 1st Row	67.5	67.5	67.5
Shoulder Room – 1st Row	67.9	67.9	67.9

CARGO DIMENSIONS — Van/Wagon

Configuration	Low Roof RWB	Med. Roof RWB	Low Roof LWB	Med. Roof LWB	High Roof LWB	High Roof LWB EL (SRW)	High Roof LWB EL (DRW)
Description (*in.*)	Van/Wagon	Van/Wagon	Van/Wagon	Van/Wagon	Van/Wagon	Van/Wagon	Van/Wagon
Cargo Length Front (at Floor)	126.0/124.0	126.0/124.0	143.7/141.7	143.7/141.7	143.7/141.7	172.2/170.2	172.2/170.2
Cargo Length Front (at Floor) – Behind 4th Row	***—/27.6(1)***	***—/27.6(1)***	***—/45.4(2)(3)***	***—/45.4(2)(3)***	***—/45.4(2)(3)***	***—/73.8(3)***	***—/73.8(3)***
Cargo Length Front (at Floor) – Behind 5th Row	***—/—***	***—/—***	***—/14.5(3)***	***—/14.5(3)***	***—/14.5(3)***	***—/43.0(3)***	***—/43.0(3)***
Cargo Length Front (at Belt)	115.9/115.1	115.9/115.1	133.6/132.8	133.6/132.8	133.6/132.8	162.0/161.3	162.0/161.3
Cargo Length Front (at Belt) – Behind 4th Row	***—/16.4(1)***	***—/16.4(1)***	***—/34.1(2)(3)***	***—/34.1(2)(3)***	***—/34.1(2)(3)***	***—/62.6(3)***	***—/62.6(3)***
Cargo Length Front (at Belt) – Behind 5th Row	***—/—***	***—/—***	***—/3.3(3)***	***—/3.3(3)***	***—/3.3(3)***	***—/31.7(3)***	***—/31.7(3)***
Cargo Width Between Wheelhouses	54.8/53.7	54.8/53.7	54.8/53.7	54.8/53.7	54.8/53.7	54.8/53.7	45.4/53.7
Cargo Height Maximum	56.9/52.8	72.0/67.6	56.9/52.8	72.0/67.6	81.5/77.0	81.5/77.0	81.5/77.0

(1) 10-passenger Wagon. ***(2) 12-passenger Wagon.*** ***(3) 15-passenger Wagon.***

PASSENGER/CARGO VOLUME — Van/Wagon

Configuration	Low Roof RWB	Med. Roof RWB	Low Roof LWB	Med. Roof LWB	High Roof LWB	High Roof LWB EL
Description (cu. ft.)	Van/Wagon	Van/Wagon	Van/Wagon	Van/Wagon	Van/Wagon	Van/Wagon
Passengers	2/8-10	2/8-10	2/12-15	2/12-15	2/12-15	2/15
Rows of Seats	1/3-4	1/3-4	1/4-5	1/4-5	1/4-5	1/5
Cargo Volume Behind 1st Row	246.7/224.5(2)	315.2/292.7	277.7/256.4	357.1/336.1	404.3/382.6	487.3(1)/ 461.9
Cargo Volume Behind 2nd Row	—/151.8	—/197.9	—/183.0	—/239.8	—/273.0	—/349.6
Cargo Volume Behind 3rd Row	—/94.2	—/125.0	—/124.5	—/166.9	—/190.0	—/266.6
Cargo Volume Behind 4th Row	—/39.1(3)	—/***51.8***	—/70.1	—/93.9	—/107.0	—/184.0
Cargo Volume Behind 5th Row	—/—	—/—	—/NA	—/NA	—/NA	—/100.5
Max. Cargo ***Volume*** w/Front-passenger Seat Removed***(4)***	285.0/—	363.8/—	316.1/—	405.6/—	459.2/—	542.2/—

— = Not available NA = Not applicable
(1) SRW models. Less incremental wheel well width for DRW.
(2) 8-passenger Wagon.
(3) 10-passenger Wagon.
(4) Van only.

RWB = Regular wheelbase
LWB = Long wheelbase
EL = Extended length
SRW = Single rear wheel
DRW = Dual rear wheel

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

2015 Transit
Weight Ratings

GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Van RWB, Low Roof (83.6")(1)

					Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
Wheelbase (in.)	**Engine**	**Max. GVWR (lbs.)**	**Max. Payload (lbs.)**	**ARC Weight (lbs.)**	**Front**	**Rear**	**Front**	**Rear**	**Total**
130.0	3.7L	8600	***3680***	***2151***	4130	5070	***2788***	***2078***	***4866***
130.0	3.5L	8600	***3600***	***2079***	4130	5070	***2872***	***2071***	***4943***
130.0	3.2L	8600	***3280***	***1740***	4130	5070	***3114***	***2153***	***5267***
130.0	3.7L	9000	***4080***	***2151***	4130	5515	***2788***	***2078***	***4866***
130.0	3.5L	9000	***4000***	***2079***	4130	5515	***2872***	***2071***	***4943***
130.0	3.2L	9000	***3680***	***1740***	4130	5515	***3114***	***2153***	***5267***

GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Van RWB, Medium Roof (100.8")(1)

					Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
Wheelbase (in.)	**Engine**	**Max. GVWR (lbs.)**	**Max. Payload (lbs.)**	**ARC Weight (lbs.)**	**Front**	**Rear**	**Front**	**Rear**	**Total**
130.0	3.7L	8600	***3550***	***1979***	4130	5070	***2816***	***2182***	***4998***
130.0	3.5L	8600	***3450***	***1908***	4130	5070	***2901***	***2192***	***5093***
130.0	3.2L	8600	***3140***	***1519***	4130	5070	***3132***	***2267***	***5399***
130.0	3.7L	9000	***3950***	***1979***	4130	5515	***2816***	***2177***	***4993***
130.0	3.5L	9000	***3850***	***1908***	4130	5515	***2905***	***2191***	***5096***
130.0	3.2L	9000	***3460***	***1519***	4130	5515	***3157***	***2326***	***5483***

(1) Weights are for single rear wheel (SRW) vehicles unless otherwise noted.

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

Transit 2015
Weight Ratings cont'd

GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Van LWB, Low Roof (83.2")(1)

					Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
Wheelbase (in.)	**Engine**	**Max. GVWR (lbs.)**	**Max. Payload (lbs.)**	**ARC Weight (lbs.)**	**Front**	**Rear**	**Front**	**Rear**	**Total**
148.0	3.7L	8600	***3550***	***1896***	4130	5070	***2838***	***2153***	***4991***
148.0	3.5L	8600	***3480***	***1824***	4130	5070	***2922***	***2146***	***5068***
148.0	3.2L	8600	***3150***	***1549***	4130	5070	***3164***	***2228***	***5392***
148.0	3.7L	9000	***3950***	***1896***	4130	5515	***2838***	***2153***	***4991***
148.0	3.5L	9000	***3830***	***1779***	4130	5515	***2922***	***2191***	***5113***
148.0	3.2L	9000	***3550***	***1549***	4130	5515	***3164***	***2228***	***5392***
148.0	3.7L	9500	***4450***	***1896***	4130	5515	***2838***	***2158***	***4991***
148.0	3.5L	9500	***4380***	***1824***	4130	5515	***2922***	***2146***	***5068***

GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Van LWB, Medium Roof (100.7")(1)

					Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
Wheelbase (in.)	**Engine**	**Max. GVWR (lbs.)**	**Max. Payload (lbs.)**	**ARC Weight (lbs.)**	**Front**	**Rear**	**Front**	**Rear**	**Total**
148.0	3.7L	8600	***3400***	***1758***	4130	5070	***2944***	***2199***	***5143***
148.0	3.5L	8600	***3330***	***1683***	4130	5070	***3025***	***2192***	***5217***
148.0	3.2L	8600	***3060***	***1513***	4130	5070	***3248***	***2234***	***5482***
148.0	3.7L	9000	***3800***	***1758***	4130	5515	***2944***	***2199***	***5143***
148.0	3.5L	9000	***3730***	***1683***	4130	5515	***3025***	***2192***	***5217***
148.0	3.2L	9000	***3460***	***1453***	4130	5515	***3248***	***2234***	***5482***
148.0	3.7L	9500	***4300***	***1758***	4130	5515	***2944***	***2199***	***5143***
148.0	3.5L	9500	***4230***	***1683***	4130	5515	***3025***	***2192***	***5217***

(1) Weights are for single rear wheel (SRW) vehicles unless otherwise noted.

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

2015 Transit

Weight Ratings cont'd

GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Van LWB, High Roof (110.1")[1]

					Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
Wheelbase (in.)	**Engine**	**Max. GVWR (lbs.)**	**Max. Payload (lbs.)**	**ARC Weight (lbs.)**	**Front**	**Rear**	**Front**	**Rear**	**Total**
148.0	3.7L	9000	***3720***	***1674***	4130	5515	***2965***	***2261***	***5226***
148.0	3.5L	9000	***3620***	***1578***	4130	5515	***3056***	***2265***	***5321***
148.0	3.2L	9000	***3330***	***1325***	4130	5515	***3288***	***2321***	***5609***
148.0	3.7L	9500	***4220***	***1674***	4130	5515	***2965***	***2261***	***5226***
148.0	3.5L	9500	***4120***	***1578***	4130	5515	***3056***	***2265***	***5321***

GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Van LWB EL, High Roof (109.4")[1]

					Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
Wheelbase (in.)	**Engine**	**Max. GVWR (lbs.)**	**Max. Payload (lbs.)**	**ARC Weight (lbs.)**	**Front**	**Rear**	**Front**	**Rear**	**Total**
148.0	3.7L	9000	***3510***	***1462***	4130	5515	***2822***	***2607***	***5429***
148.0	3.5L	9000	3430	***1376***	4130	5515	***2902***	***2612***	***5514***
148.0	3.2L	9000	***3140***	***1198***	4130	5515	***3153***	***2645***	***5798***
148.0	3.7L	9500	***4010***	***1462***	4130	6000	***2822***	***2607***	***5429***
148.0	3.5L	9500	3930	***1376***	4130	6000	***2902***	***2612***	***5514***
148.0	3.2L	9500	***3640***	***1198***	4130	6000	***3153***	***2645***	***5798***
148.0 DRW	3.5L	9950	***4150***	***1152***	4130	6835	***2933***	***2803***	***5736***
148.0 DRW	3.2L	9950	***3890***	***996***	4130	6835	***3152***	***2846***	***5998***
148.0 DRW	3.5L	10,360	***4560***	***1152***	4130	7275	***2933***	***2803***	***5736***
148.0 DRW	3.2L	10,360	***4300***	***996***	4130	7275	***3152***	***2846***	***5998***

(1) Weights are for single rear wheel (SRW) vehicles unless otherwise noted.

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

Transit 2015
Weight Ratings cont'd

GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Wagon RWB, Low Roof (82.2")(1)

					Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
Wheelbase (in.)	**Engine**	**Max. GVWR (lbs.)**	**Max. Payload (lbs.)**	**ARC Weight (lbs.)**	**Front**	**Rear**	**Front**	**Rear**	**Total**
130.0	3.7L	8550	***3000***	***1494***	4130	5070	***2900***	***2588***	***5488***
130.0	3.7L	8550	***2900***	***1383***	4130	5070	***2890***	***2702***	***5592***
130.0	3.5L	8550	***2930***	***1422***	4130	5070	***2983***	***2577***	***5560***
130.0	3.5L	8550	***2820***	***1311***	4130	5070	***2973***	***2697***	***5670***

GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Wagon RWB, Medium Roof (98.7")(1)

					Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
Wheelbase (in.)	**Engine**	**Max. GVWR (lbs.)**	**Max. Payload (lbs.)**	**ARC Weight (lbs.)**	**Front**	**Rear**	**Front**	**Rear**	**Total**
130.0	3.7L	8550	***2890***	***1322***	4130	5070	***2927***	***2668***	***5595***
130.0	3.7L	8550	***2728***	***1211***	4130	5070	***2917***	***2788***	***5705***
130.0	3.5L	8550	***2740***	***1251***	4130	5070	***3014***	***2729***	***5743***
130.0	3.5L	8550	***2630***	***1140***	4130	5070	***3004***	***2849***	***5853***

GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Wagon LWB, Low Roof (82.4")(1)

					Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
Wheelbase (in.)	**Engine**	**Max. GVWR (lbs.)**	**Max. Payload (lbs.)**	**ARC Weight (lbs.)**	**Front**	**Rear**	**Front**	**Rear**	**Total**
148.0	3.7L	***9000***	2730	***928***	4130	***5730***	***3087***	***3119***	***6206***
148.0	3.5L	***9000***	***2690***	***887***	4130	***5730***	***3155***	***3092***	***6247***
148.0	3.2L	***9250***	***2660***	***681***	4130	***5730***	***3400***	***3125***	***6525***
148.0	3.7L	9000	2900	***755***	4130	5730	***3105***	***2929***	6034
148.0	3.5L	9000	***2860***	***713***	4130	5730	***3187***	***2888***	***6075***
148.0	3.2L	9250	***2830***	***507***	4130	5730	***3402***	***2951***	***6353***

(1) Weights are for single rear wheel (SRW) vehicles unless otherwise noted.

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

2015 Transit

Weight Ratings cont'd

GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Wagon LWB, Medium Roof (99.2")(1)

					Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
Wheelbase (in.)	**Engine**	**Max. GVWR (lbs.)**	**Max. Payload (lbs.)**	**ARC Weight (lbs.)**	**Front**	**Rear**	**Front**	**Rear**	**Total**
148.0	3.7L	***9150***	***2780***	***654***	4130	***5730***	***3117***	***3189***	***6306***
148.0	3.5L	***9150***	***2730***	***612***	4130	***5730***	***3185***	***3162***	***6347***
148.0	3.2L	***9440***	***2700***	***297***	4130	***5730***	***3430***	***3195***	***6625***
148.0	3.7L	9000	***2800***	***827***	4130	5730	***3135***	***2999***	***6134***
148.0	3.5L	9000	***2760***	***786***	4130	5730	***3217***	***2958***	***6175***
148.0	3.2L	9250	***2730***	***580***	4130	5730	***3432***	***3021***	***6453***

GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Wagon LWB, High Roof (108.6")(1)

					Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
Wheelbase (in.)	**Engine**	**Max. GVWR (lbs.)**	**Max. Payload (lbs.)**	**ARC Weight (lbs.)**	**Front**	**Rear**	**Front**	**Rear**	**Total**
148.0	3.7L	***9150***	***2690***	***563***	4130	***5730***	***3137***	***3259***	***6396***
148.0	3.5L	***9150***	***2640***	***521***	4130	***5730***	***3205***	***3232***	***6437***
148.0	3.2L	***9400***	***2610***	***256***	4130	***5730***	***3450***	***3265***	***6715***
148.0	3.7L	9000	***2710***	***736***	4130	5730	***3155***	***3069***	***6224***
148.0	3.5L	9000	***2670***	***695***	4130	5730	***3237***	***3028***	***6265***
148.0	3.2L	9250	***2640***	***415***	4130	5730	***3452***	***3091***	***6543***

GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Wagon LWB EL, High Roof (107.7")(1)

					Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
Wheelbase (in.)	**Engine**	**Max. GVWR (lbs.)**	**Max. Payload (lbs.)**	**ARC Weight (lbs.)**	**Front**	**Rear**	**Front**	**Rear**	**Total**
148.0 DRW	3.5L	10,360	***3480***	***391***	4130	6720	***3055***	***3755***	***6810***
148.0 DRW	3.2L	10,360	***3160***	***109***	4130	6720	***3303***	***3821***	***7124***

(1) Weights are for single rear wheel (SRW) vehicles unless otherwise noted.

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Cutaway, 138.0"/156.0"/178.0" Lengths, Low Roof (87.3")(1)

					Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
Length (in.)	Engine	Max. GVWR (lbs.)	Max. Payload (lbs.)	ARC Weight (lbs.)	Front	Rear	Front	Rear	Total
138.0	3.7L	9000	***4850***	***4180***	4130	5515	***2850***	***1251***	***4101***
138.0	3.2L	9000	***4500***	***3874***	4130	5515	***3156***	***1295***	***4451***
138.0 DRW	3.7L	9950	***5610***	***3989***	4130	6500	***2874***	***1416***	***4290***
138.0 DRW	3.2L	9950	***5270***	***3683***	4130	6500	***3176***	***1454***	***4630***
138.0 DRW	3.7L	10,360	***6020***	***3989***	4130	7275	***2874***	***1416***	***4290***
138.0 DRW	3.2L	10,360	***5680***	***3983***	4130	7275	***3176***	***1454***	***4630***
156.0	3.7L	9000	***4790***	***4107***	4130	5515	***2880***	***1281***	***4161***
156.0	3.2L	9000	***4450***	***3803***	4130	5515	***3182***	***1319***	***4501***
156.0	3.7L	9500	***5290***	***4107***	4130	6000	***2880***	***1281***	***4161***
156.0	3.2L	9500	***4950***	***3803***	4130	6000	***3182***	***1319***	***4501***
156.0 DRW	3.7L	9950	***5550***	***3916***	4130	6835	***2910***	***1440***	***4350***
156.0 DRW	3.2L	9950	***5210***	***3612***	4130	6835	***3212***	***1478***	***4690***
156.0 DRW	3.7L	10,360	***5960***	***3916***	4130	7275	***2910***	***1440***	***4350***
156.0 DRW	3.2L	10,360	***5620***	***3612***	4130	7275	***3212***	***1478***	***4690***
178.0 DRW	3.7L	9950	***5460***	***3803***	4130	6835	***2940***	***1505***	***4445***
178.0 DRW	3.2L	9950	***5110***	***3497***	4130	6835	***3238***	***1547***	***4785***
178.0 DRW	3.7L	10,360	***5870***	***3803***	4130	7275	***2940***	***1505***	***4445***
178.0 DRW	3.2L	10,360	***5520***	***3497***	4130	7275	***3238***	***1547***	***4785***

(1) Weights are for single rear wheel (SRW) vehicles unless otherwise noted.

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

2015 Transit

Weight Ratings cont'd

GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Chassis Cab, 138.0"/156.0"/178.0" Lengths, Low Roof (87.2")(1)

					Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
Length (in.)	**Engine**	**Max. GVWR (lbs.)**	**Max. Payload (lbs.)**	**ARC Weight (lbs.)**	**Front**	**Rear**	**Front**	**Rear**	**Total**
138.0	3.7L	9000	***4280***	***4163***	4130	5515	***2866***	***1265***	***4131***
138.0	3.2L	9000	***4290***	***3843***	4130	5515	***3029***	***1634***	***4663***
138.0 DRW	3.7L	9950	***5580***	***3972***	4130	6500	***2890***	***1430***	***4320***
138.0 DRW	3.2L	9950	***5240***	***3652***	4130	6500	***3191***	***1469***	***4660***
138.0 DRW	3.7L	10,360	***5990***	***3972***	4130	7275	***2890***	***1430***	***4320***
138.0 DRW	3.2L	10,360	***5650***	***3652***	4130	7275	***3191***	***1469***	***4660***
156.0	3.7L	9000	***4720***	***4100***	4130	5515	***2896***	***1340***	***4236***
156.0	3.2L	9000	***4420***	***3773***	4130	5515	***3197***	***1334***	***4531***
156.0	3.7L	9500	***5220***	***4055***	4130	6000	***2896***	***1340***	***4236***
156.0	3.2L	9500	***4920***	***3773***	4130	6000	***3197***	***1334***	***4531***
156.0 DRW	3.7L	9950	***5480***	***3899***	4130	6835	***2926***	***1499***	***4425***
156.0 DRW	3.2L	9950	***5180***	***3582***	4130	6835	***3224***	***1496***	***4720***
156.0 DRW	3.7L	10,360	***5890***	***3899***	4130	7275	***2926***	***1499***	***4425***
156.0 DRW	3.2L	10,360	***5590***	***3582***	4130	7275	***3224***	***1496***	***4720***
178.0 DRW	3.7L	9950	***5380***	***3786***	4130	6835	***2956***	***1564***	***4520***
178.0 DRW	3.2L	9950	***5080***	***3467***	4130	6835	***3254***	***1561***	***4815***
178.0 DRW	3.7L	10,360	***5790***	***3786***	4130	7275	***2956***	***1564***	***4520***
178.0	3.2L	10,360	***5490***	***3467***	4130	7275	***3254***	***1561***	***4815***

(1) Weights are for single rear wheel (SRW) vehicles unless otherwise noted.

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

Axles
REAR AXLE SPECIFICATIONS

		SRW/DRW
Make		Sterling
Max. Rating @ Ground (lbs.)		5512/7275
Driveline Attachment	— Type	Circular Flange
	— Bolt Circle (in.)	4.25
Housing	— Type	Cast Iron Carrier
	— Size (in.)	9.75
	— CoverAttachment	Steel
Section	— Tube Dia. (in.)	3.24
	— Thickness (in.)	0.32/0.42
Synthetic Lubricant	— Type	75W85
	— Capacity (pt.)	6.0–6.15 (Conventional) 5.75–5.90 (Limited-slip)
Spring Centers (in.)		48.51/43.70
Wheel Bearings	— Type	Tapered Roller
Gears	— Type	Hypoid
	— Material	Steel
Ring Gear	— Pitch Dia. (in.)	9.75
Pinion	— Mounting	Straddle
Differential	— Type	Conventional and L/S
Axle Shaft	— Spline Minor Dia. (in.)	1.29
	— Spine Major Dia (in.)	1.37
	— No. of Splines (Hub End)	34

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

2015 Transit
Technical Specifications cont'd

Brakes
FRONT/REAR DISC

Type	Series/ Model	Axle Usage (lbs.)	Rotor Dia. (in.) OD	Rotor Dia. (in.) ID	Brake Lining Segment	Area (sq. in.)/ Width (in.)/ Thickness (in.)	Caliper Piston No. Dia. (in.)	Gross Lining Area Per Axle (sq. in.)	Total Swept Area Per Axle (sq. in.)
Front Disc	Van	All	12.1	6.5	Outboard	8.4/2.3/0.33	2 x 1.89	16.8	163.0
					Inboard	8.4/2.3/0.33	2 x 1.89	16.8	163.0
	Wagon	All	12.1	6.5	Outboard	8.4/2.3/0.33	2 x 1.89	16.8	163.0
					Inboard	8.4/2.3/0.33	2 x 1.89	16.8	163.0
	Cutaway/ Chassis Cab	All	12.1	6.5	Outboard	8.4/2.3/0.33	2 x 1.89	16.8	163.0
					Inboard	8.4/2.3/0.33	2 x 1.89	16.8	163.0
Rear Disc	Van	All	12.1	7.9	Outboard	6.0/1.9/0.41	1 x 2.13	12.0	133.0
					Inboard	6.0/1.9/0.41	1 x 2.13	12.0	133.0
	Wagon	All	12.1	7.9	Outboard	6.0/1.9/0.41	1 x 2.13	12.0	133.0
					Inboard	6.0/1.9/0.41	1 x 2.13	12.0	133.0
	Cutaway/ Chassis Cab	All	12.1	7.9	Outboard	6.0/1.9/0.41	1 x 2.13	12.0	133.0
					Inboard	6.0/1.9/0.41	1 x 2.13	12.0	133.0

BRAKE MASTER CYLINDER SPECIFICATIONS

Type	Series/Model	Bore Dia. (in.)	Booster Type
Dual System, Dash-mounted	N/A	1.125	10+10 Tandem

Cooling Systems
COOLING SYSTEM SPECIFICATIONS

			Radiator								Fan Specifications		
				Core Size (in.)									
Engine	Cooling	Trans. Usage	Frontal Area (sq. in.)	Height	Width	Thick-ness	Rows of Tubes	Fins Per Inch	Cooling System Capacity (qts.)	In-tank Trans. Cooler	Type	No. of Blades	Blade Dia. (in.)
3.7L V6	Standard	6R80	583.5	19.25	30.31	0.99	1	21.6	12.4 (Base) 13.6 (Aux.)	NA	Twin Electric	7+7	12.2 15.16
3.5L EcoBoost V6	Standard	6R80	583.5	19.25	30.31	0.99	1	21.6	12.4 (Base) 13.6 (Aux.)	NA	Twin Electric	7+7	12.2 15.16
3.2L Power Stroke I-5 Diesel (Main Loop)	Standard	6R80	583.5	19.25	30.31	0.99	1	21.6	11.6 (Base) 12.8 (Aux.)	NA	Viscous + Single Electric	9 (Visc.) 11 (Elec.)	15.35 (Visc.) 11 (Elec.)

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

Transit 2015

Technical Specifications cont'd

BODY			
Construction	Steel unibody		
Final Assembly Location	Kansas City, MO		
POWERTRAIN AND CHASSIS			
ENGINE			
Type	3.7L V6	3.5L EcoBoost V6	3.2L Power Stroke I-5 Diesel
Manufacturing Location	Cleveland Engine Plant	Cleveland Engine Plant	Struandale Engine Plant, South Africa
Configuration	Aluminum block and head	Aluminum block and head	Cast-iron block and aluminum head
Intake Manifold	Composite	Composite	Injection-molded, friction-molded PA manifold
Exhaust Manifold	Cast high Sil Moly	Cast high Sil Moly	Grade 3 SiMo ductile iron
Crankshaft	Forged	Forged	Cast Iron
Redline	6850 rpm	6200 rpm	4500 rpm
Idle Speed in Drive	600 rpm	580 rpm	800±50 rpm
Throttle Body	Electronic	Electronic	Electronic
Valvetrain	DOHC, 4 valves per cylinder	DOHC, 4 valves per cylinder	DOHC, 4 valves per cylinder
Cylinder Head Valve Diameter (mm)	Intake 37, Exhaust	Intake 37, Exhaust 31	Intake 29.9, Exhaust 25.8
Pistons	Aluminum	Aluminum with steel ring carrier	Cast aluminum
Connecting Rods	Powdered metal	Powdered metal	Forged
Ignition	Coil-on-plug	Coil-on-plug	ISS metallic glow plug
Bore (in.) x Stroke (in.)	3.76 x 3.41	3.64 x 3.41	3.54 x 3.96
Displacement (cu. in./cc)	227/3731	213/3496	195/3198
Compression Ratio	10.5:1	10.0:1	15.8:1
Horsepower	***275*** @ ***6000*** rpm	***310*** @ ***5500*** rpm	***185*** @ 3000 rpm
Torque (lb.-ft.)	***260*** @ 4000 rpm	400 @ ***2500*** rpm	***350 @ 1500–2500 rpm***
Recommended Fuel (octane)	87 or E85	87	B20
Fuel Capacity (gal.)	25	25	25
Fuel Injection	Sequential multiport electronic	Direct gasoline injection, dual turbochargers	High-pressure common-rail direct diesel injection
Oil Capacity (quarts)	6.9	7.0	11.6 (max. dipstick [wet oil fill])
Recommended Oil	***SAE 5W-20 WSS-M2C945-A or API GF-5***	***SAE 5W-30 WSS-M2C946-A or API GF-5***	***SAE 5W-40 WSS-M2C171-E or API CJ-4***
Coolant Capacity (gal.)	3.1 (Base) 3.4 (Aux.)	3.1 (Base) 3.4 (Aux.)	2.9 (Base) 3.2 (Aux.)
EMISSIONS			
Federal Standards	Yes	Yes	Yes
California Standards	Yes	Yes	TBD
DRIVETRAIN			
Layout	Front-engine, rear-wheel drive	Front-engine, rear-wheel drive	Front-engine, rear-wheel drive
TRANSMISSION			
Type	6-speed automatic overdrive with SelectShift		

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

2015 Transit

Technical Specifications cont'd

GEAR RATIOS			
1st	4.17:1		
2nd	2.34:1		
3rd	1.52:1		
4th	1.14:1		
5th	0.86:1		
6th	0.69:1		
Reverse	3.40:1		
SUSPENSION			
Front	Independent MacPherson strut with stabilizer bar		
Rear	Solid axle, leaf springs, heavy-duty gas shock absorbers		
STEERING			
Type	Hydraulic power rack-and-pinion		
Steering Column	Collapsible		
Turning Diameter (curb-to-curb) (ft.)	Length (in.)	Wheelbase	SRW/DRW
Van/Wagon	130.0	RWB	42.9/—
	148.0	LWB	48.0/47.8
Cutaway/Chassis Cab	138.0	RWB	45.2/45.0
	156.0	LWB	50.3/50.1
	178.0	LWB EL	—/56.4
BRAKES			
Type	4-wheel vented front disc and solid rear disc with Anti-lock Braking System (ABS)		
Front	Twin-piston front calipers, semi-metallic pads		
Rear	Single-piston integrated calipers, low-metallic pads		
Assist Type	Vacuum, RSC		
PARKING BRAKE			
Type	Rear brake integrated caliper, hand-operated		
ELECTRICAL			
Alternator	— Rating	150 amps, 2025 watts	
Alternator, HD	— Rating	***230*** amps, ***3105*** watts (Gas)	
	— Rating	210 amps, 2835 watts (Diesel)	
Battery	— Type	Maintenance-free	
	— Rating	***70*** amp/hr., ***610*** CCA ***(Gas)***	
	— Rating	***70*** amp/hr., 760 CCA, AGM (***std. Diesel,*** opt. Gas)	
WHEELS AND TIRES			
Wheels	16" steel		
Tires	235/65R16C 121/119R BSW (SRW)		
	195/75R16C 107/105R BSW (DRW) ETRO Commercial Tires		
FUEL ECONOMY — *EPA-estimated Ratings (city/hwy./combined)*[1]			
3.7L V6 (gas) — T-150 Wagon	***14/19/16***		
3.7L V6 (FFV) — T-150 Wagon	***10/14/12***		

(1) Actual mileage will vary.

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.